

# LTS-60TH


**Designed with temperature and humidity sensors, monitoring goods conveniently!**

⚖ | 198g      ✂ | 102mm(L) × 55mm(W) × 24mm(H)

🌡 | -20° to 55° C      🔋 | Rechargeable 3.7V 8000mAh

- 📍 Accurate location
- 📶 Dual Mode location
- 🔋 60 days standby time
- 🌡 Temperature and Humidity
- 🧲 Powerful magnet
- 🔄 Track playback
- 🎤 Remote Monitoring
- 📱 SMS and APP
- 🕒 Can change interval time
- 🖥 Tracking Platform
- ☁ Regular upload
- 🔄 Continuous operation mode
- 🔍 Query status
- 👤 Owner Binding


The LTS-60TH is working based on existing GSM/GPRS network and GPS satellites, can locate and monitor any remote targets by SMS or internet. The most advanced technology of GPS and AGPS dual-positioning. built-in high capacity battery, long standby, easy installation + strong magnetic adsorption portable GPS locator, deep dormancy prevents detection radar scan.

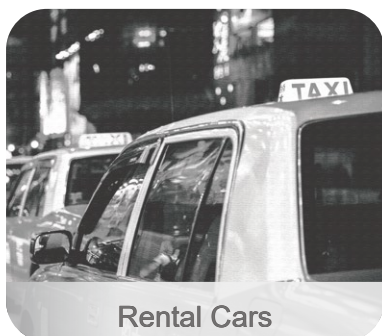

Rental Cars



Truck

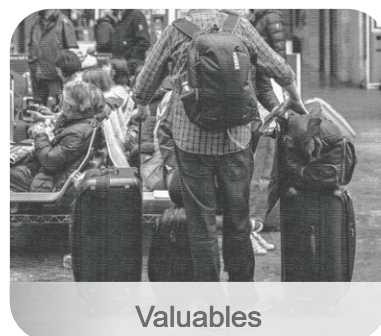

Valuables

## LTS-60TH

	Region	GSM module	GNSS Type	Position Accuracy	Certificate
LTS-60TH	Worldwide	GSM 850/900/1800/1900Mhz	u-blox All-in-One GNSS receiver	5m (3D positioning mode)	CE



## SPECIFICATIONS

Working humidity	5% to 95% Non-condensing
Network	GSM/GPRS
GPS Chips	MT2503D
GSM/GPRS Module	MTK2503
GPS Sensitivity	-161dBm
GPS Accuracy	5m(3D positioning mode)
Time To First Fix	Cold status 45-120s Warm status 35s Hot status 1s
Battery	Rechargeable 3.7V 8000mAh
Standby	60 Days
Storage Temp	-40°C to +85°C
Working Temp	-20°C to +55°C
Bands	850/900/1800/1900Mhz
LED lights	1 LED lights show GPS, GPRS status
Powerful magnet	Built-in