



MT-009


Real-time tracking tracker with backup battery, anti-theft and remotely control.

⚖ | 24g ✂ | 145mm(L) × 23mm(W) × 12mm(H)

🌡 | -20° to 55° C ⚡ | Working voltage: 9—100V


- 📍 Accurate location
- 📶 Multiple mode location
- ⚡ ACC oil line detection
- 🔌 Remote cut oil and circuit
- 📱 SMS and APP
- 🔔 Light sense alarm
- 🔊 Vibration alarm
- 🚗 Speeding alarm
- 🌙 Sleep mode
- 💻 Tracking Platform
- ☁ Regular upload
- 🔄 Continuous operation mode
- 🔍 Query status
- 🔑 Owner Binding

The is MT-009 a universal version of the miniature positioning terminal designed for automobiles, motorcycles and electric bicycles. It is compact and easy to install concealed. It combines GPS and GPRS communication technology with real-time positioning tracking, track playback and illegal movement. Alarm, power off and vibration alarms.

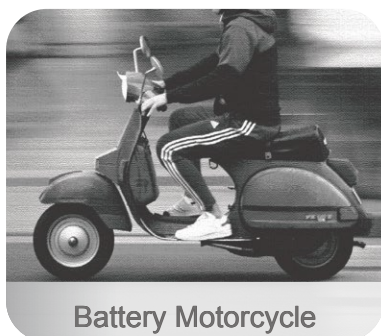

MT-009

	Region	GSM module	GNSS Type	Position Accuracy	Certificate
MT-009	Worldwide	GSM 850/900/1800/1900Mhz	u-blox All-in-One GNSS receiver	10m	CE

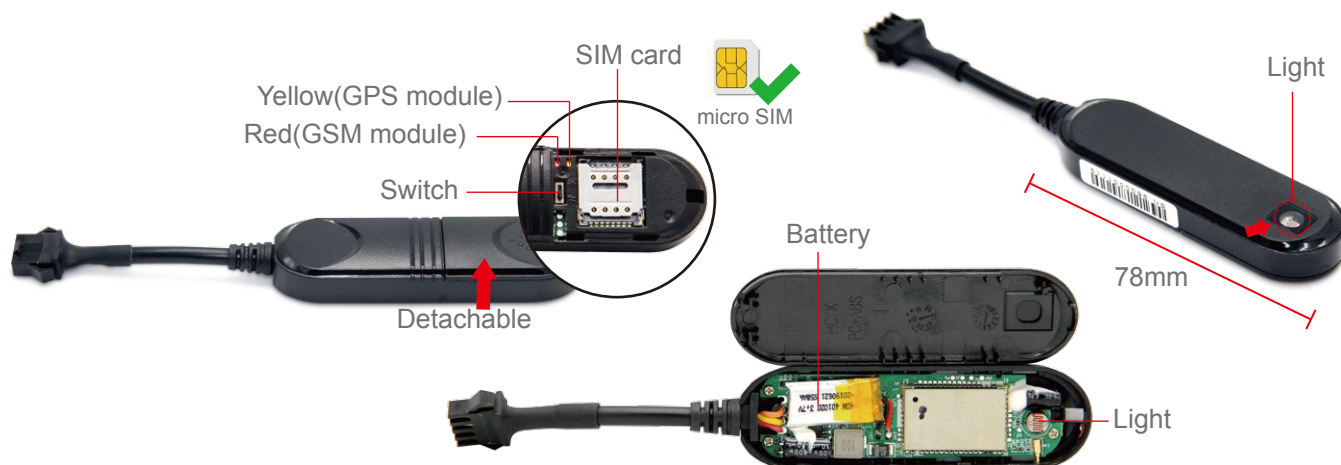

SPECIFICATIONS

Network	GSM/GPRS
GPS module	UBLOX
GPS sensitivity	-159dBm
First positioning time	Cold start 35-80s Warm start 35s Hot start 1s
Working voltage	9 – 100V
Storage temperature	-40°C to +85°C
Working temperature	-20°C to +55°C
Humidity	5%–95% Non freezing
Update time	Average 0.1 sec.
Maximum height	18,000 meters (60,000 feet) max.
Maximum speed	515 meters/second (1000 knots) max.
Maximum acceleration	Less than 4g
Instantaneous displacement	20 m/sec
LED lights	2 LED lights show GPS, GSM status